

Product: Gauge syphons > Ring syphons

About gauge syphons

Gauge syphons are essential for the protection of sensitive instrumentation on steam lines and other pressure equipment.

Ring syphons manufactured by CMT Engineering:

We make both Ring syphons and U syphons in the West Midlands, UK.


Our Ring syphons:

- Are manufactured in mild steel (BS EN10255), 316L stainless steel or brass (CZ126)
- Are available in sizes 8mm (1/4"), 10mm (3/8") and 1/2" (15mm)
- Have a standard pattern of screwed BSP taper/BSP parallel, fitted with two back nuts on parallel end as standard (with special patterns available on request)
- Have a maximum recommended pressure rating of 16 bar with steam up to 260 degrees C
- Can be requested with thicker wall sizes - talk to us about your order.

NPT (National Pipe Taper standard) threads are also available on request.



Ring syphons

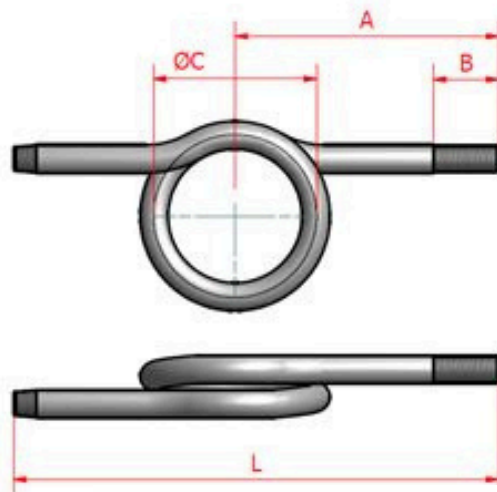

Mild steel BS EN10255
heavyweight



Stainless steel 316L



Brass CZ126

Nominal bore: metric	Nominal bore: imperial	Length (dimension A)	Length (dimension B)	Length (dimension C)	Length (dimension L)	Weight each (including nuts)
8mm	1/4"	137mm	38.5mm	91mm	252mm	0.46kg
10mm	3/8"	166mm	40mm	94mm	296mm	0.59kg
15mm	1/2"	177mm	55.5mm	100mm	331mm	0.86kg

Order today:

01384 563 200

sales@cmt-engineering.co.uk

www.cmt-engineering.co.uk