

Product: Gauge syphons > U syphons

About gauge syphons

Gauge syphons are essential for the protection of sensitive instrumentation on steam lines and other pressure equipment.

Gauge syphons manufactured by CMT Engineering:

We make both U syphons and Ring syphons in the West Midlands, UK.


Our U syphons:

- Are manufactured in mild steel (BS EN10255), 316L stainless steel or brass (CZ126)
- Are available in sizes 8mm (1/4"), 10mm (3/8") and 1/2" (15mm)
- Have a standard pattern of screwed BSP taper/BSP parallel, fitted with two back nuts on parallel end as standard (with special patterns available on request)
- Have a maximum recommended pressure rating of 16 bar with steam up to 260 degrees C
- Can be requested with thicker wall sizes - talk to us about your order.

NPT (National Pipe Taper standard) threads are also available on request.



U syphons

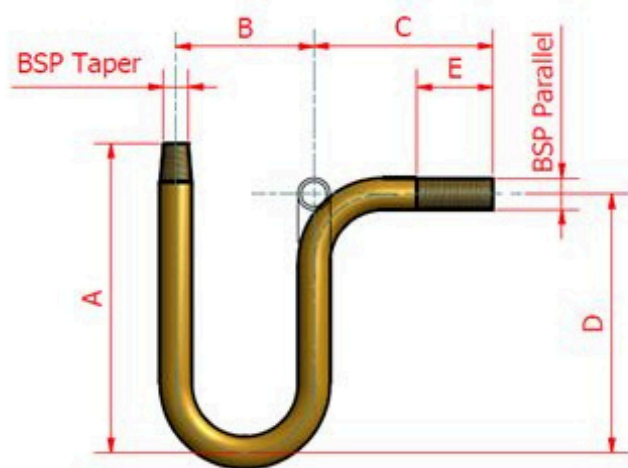

Right hand pattern



Mild steel BS EN10255
heavyweight



Stainless steel 316L



Brass CZ126

Nominal bore: metric	Nominal bore: imperial	Length (dimension A)	Length (dimension B)	Length (dimension C)	Length (dimension D)	Length (dimension E)	Weight each (including nuts)
8mm	1/4"	154.5mm	68.5mm	86mm	132mm	38.5mm	0.34kg
10mm	3/8"	163mm	73mm	94.5mm	136.5mm	40mm	0.43kg
15mm	1/2"	210.5mm	91.5mm	124mm	174.5mm	55mm	0.63kg

Order today:

01384 563 200

sales@cmt-engineering.co.uk

www.cmt-engineering.co.uk